

How to Clean Tilt in Counterbalanced Verticals

The tilt mechanism on the vertical slider should be used for cleaning only, and not for day to day use. To clean the window please follow the instructions below carefully:-

Top Panel

Gently lower the top panel until it reaches the stops at the bottom of the frame.

Bottom Panel

Keep one hand in the centre at all times to stop the panel falling whilst undoing the tilt latches.

Insert the key into the latch at the top of the bottom panel and undo the grub screws one complete turn and slide the latches towards the centre of the panel. Whilst applying a slight downwards pressure as shown in the drawing by the bold or red arrow, gently lower the panel until the arms take the full weight of the panel. The glass can now be cleaned but avoid leaning on the panel for support.

Top Panel

Keep one hand in the centre at all times to stop the panel falling whilst undoing the tilt latches.


Insert the key into the latch at the top of the top panel and undo the grub screws one complete turn and slide the latches towards the centre of the panel. Whilst applying a slight downwards pressure as shown in the drawing by the bold or red arrow, gently lower the panel until the arms take the full weight of the panel. The glass can now be cleaned but avoid leaning on the panel for support.

To close the top panel keep a slight downwards pressure as shown in the drawing by the bold or red arrow and shut the panel into the frame. Whilst holding the panel shut engage the tilt latches both sides and tighten the grub screw.

Bottom Panel

To close the bottom panel keep a slight downwards pressure as shown in the drawing by the bold or red arrow and shut the panel into the frame. Whilst holding the panel shut engage the tilt latches both sides and tighten the grub screw.

Carefully check both panels are fully closed and that the tilt latches are fully engaged and grub screws are tightened.

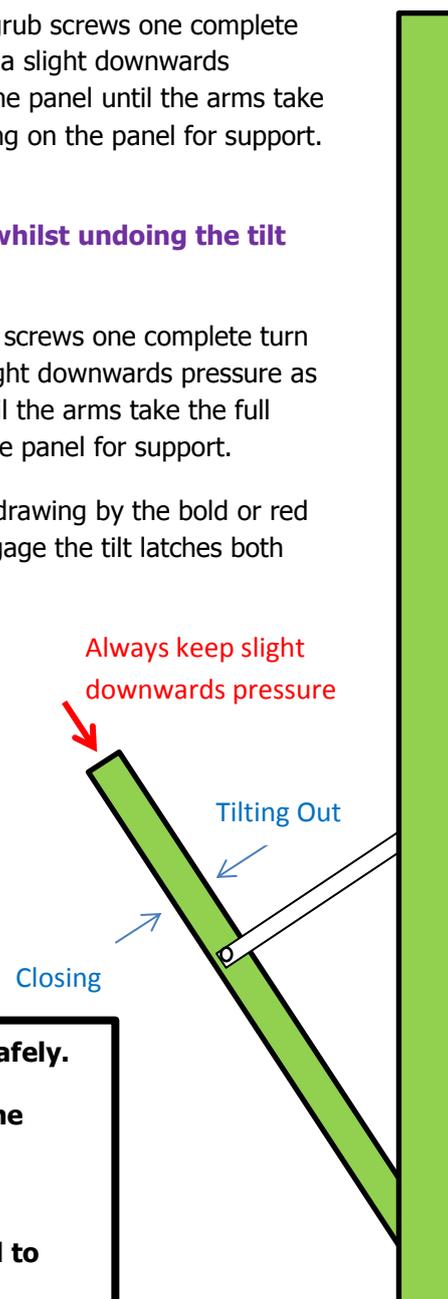

Larger windows may require two people to operate the window safely.

If a panel is dropped accidentally onto its stay arms, always have the window checked by your installer to ensure its continued safe operation.

Keep the key in a safe place and do not allow untrained personnel to operate the window.

Never remove the stops from the frame.

If the panels ever slide or creep down on their own, this may indicate spring failure and should be checked by your installer before further operation.

Secondary Glazing London - A Division of Cricklewood Glass

229 Cricklewood Broadway

London NW2 3HP

Phone Number: 0208 452 0039

email: service@cricklewoodglass.co.uk

web: www.cricklewoodglass.co.uk

Name and Registered Office:

The Glass Shop Cricklewood Ltd

30 Milton Road, Westcliffe On Sea, Essex, SSO 7JX.

Registered in England and Wales - Registered Company No. 06605681

Vat Registration No. UMBER 935 4571 08 2007 © The Glass Shop Cricklewood Ltd. All rights reserved